




	WARNING
	Conducted Electrical Weapon • Can temporarily incapacitate target. • Can cause death or serious injury. • Obey warnings, instructions and all laws. • Comply with current training materials and requirements. • See www.PHAZZER.com.

PhaZZer Enforcer Conducted Electrical Weapon (CEW) Models Output Characteristics and Features Data Sheet¹

Model	Model No.	Color
PhaZZer Enforcer w/Dataport	1-EBLK-DP	Black
PhaZZer Enforcer w/Dataport(Yellow)	1-EYLW-DP	Yellow
PhaZZer Enforcer (Black)	1-EBLK	Black
PhaZZer Enforcer(Yellow)	1-EYLW	Yellow

Specifications ^{2, 3}	Features
1. Output specifications ^{4,5} <ul style="list-style-type: none"> • Waveform: Patented Non-Sinusoidal Shaped Pulse. • Peak Open Voltage: 55,000 Volts (V) (+/- 20%)** • Pulse rate: 21-24 (PPS) pulses per seconds (-3 / +1 PPS). • Pulse Duration: 90-110 microseconds (+/- 20%). • Peak Loaded Voltage 3,500 to 5,000 (V) into a human body equivalent 600-ohm non-inductive load (+/- 20%). • Current: 2.0 Milliamperes (mA) Average (-10% / +5%). • Full pulse total charge 70 microcoulombs (µC) (+/- 20%). 2. Operating and Storage Temperature Range: -4 °F [- 20°C] to 122 °F [50 °C]. 3. Operating relative humidity: Up to 95% (non-condensing). 4. Estimated useful life: Approximately five years. 5. Power source: 7.4 V 1000mAh Lithium Ion in-weapon Rechargeable and Replaceable Battery Pack. Battery requires a minimum 3-hour maintenance charge every six months. ⁶	1. Housing: ABS High Impact Plastic. 2. Three Finger Grip with non-conductive rubber sleeve overlay offers a greater level of comfort and control of your weapon. 3. 3W, 160 Lumen, High-Intensity L.E.D. Beam Light. 4. 6.5 mW, 650 nm Red Class IIIa Laser for target acquisition. 5. Ambidextrous and Autonomous LED Activation Switches. (Can be activated independent or simultaneous from weapon/laser activation) 6. Safety Shut Down Technology: A patent pending over-exposure safety technology which shuts down the weapon system after three consecutive five-second pulse train discharges to avoid overexposure. ⁷ 7. The trigger activates a pulse train of approximately five seconds. Holding the trigger will not continue the discharge. A new trigger pull is required to start a new pulse train for a maximum of three trigger pulls. 8. The weapon ammunition bay is compatible with TASER® Standard Series Cartridges. ⁸ 9. Static Guard™ a patent pending ammunition cartridge guard which prohibits unintentional discharge of the cartridge. This safety mechanism has been approved by the DOT rendering the ammunition as non-hazardous for shipping by air, land or sea. Special handling is not required. 10. Fully Rechargeable Battery System with built-in overcharge prevention.

Physical Characteristics ⁸				
Length (L)	Height (H)	Width (W)	Weight	Length w/ Dart Cartridge
12.184 oz. (0.7615 lbs.)	4.2 in. 120mm	1.45 in. 38mm	12.184 oz. (0.7615 lbs.) 345.4 g	8 in. 204mm

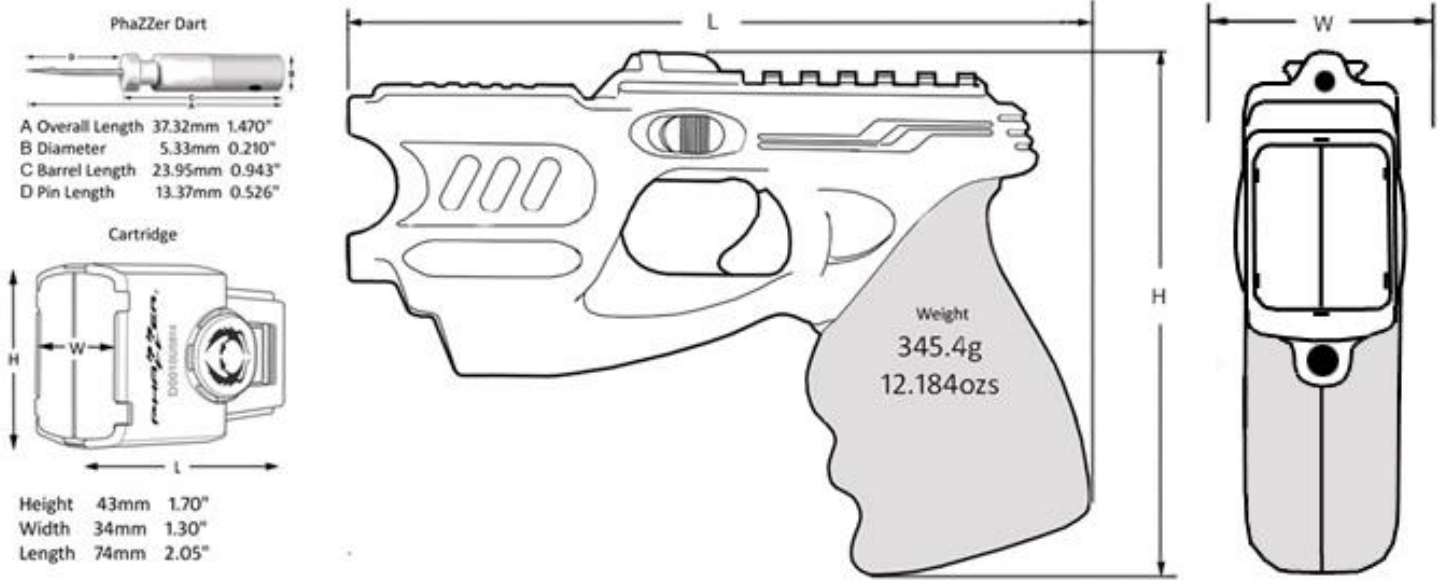

NOTES:

1. The design of the PhaZZer Enforcer combines Simplicity, Reliability, Effectiveness and Safety together. This Less Lethal Option is one of the safest and most effective tools available to Law Enforcement Worldwide. PhaZZer® Brand Weapon have no death on record from the use of our weapons as of the date of this publishing.
2. Additional accessories are available. Please contact a PhaZZer® sales representative.
3. These products may be covered under one or more of the following: U.S. Pat. No. 7,554,786 B2, U.S. Pat. No. 8,733,251 B1 and/or additional U.S. Pat. Pending which are licensed to Phazzer.
4. Product specifications may change without notice; actual product may vary from picture.
Output specifications may vary depending on temperature, battery charge, or load characteristics. Output specifications derived from 250, 600, and 1,000 Ω resistive loads. The ENFORCER CEW is designed to keep the output charge at ~ 70 μC (mean value is based on the measurement of the entire 5-second pulse train) independent of the load (body) impedances and varying from 250 to 1000 Ω .
Pulse rate specifications are at room temperature. Temperatures below 32 °F [0 °C] and extreme output loads can reduce the pulse rate.
5. Battery life expectancy, when properly maintained, is 3 to 6 years and / or 3000-5000 five-second discharge cycles. Although the number of firings between charges will vary due to environmental and usage conditions, we recommend that you charge the battery for 2-3 hrs. every 6-8 weeks. In the opinion of Phazzer Electronic Inc., this battery system may save the owner of a PhaZZer Enforcer a significant amount of money over time, possibly making its use more environmentally friendly.
6. The weapon's Safety Shut Down Circuit shuts down the weapon system after three consecutive five-second pulse train discharges but can be manually overridden by the user if additional deployments are necessary to control a situation at hand. When safety shutdown is initiated, it creates a mental awareness to the user that he has exposed the suspect to the currently recommended maximum exposures in a 24-hour period. The maximum exposure, at 15 seconds of aggregate exposure over a 24-hour period, has been established by the AAEM medical studies.
7. PhaZZer series cartridge specifications are available by contacting a PhaZZer® sales representative. PhaZZer standard series cartridges are available in ranges of 15', 21' and 25'. PhaZZer also offers patented alternative ammunition cartridges such as Pepper Powder, Pepper Ball, Paint Ball Marker, and Rubber Ball Impact Round. All PhaZZer® Brand Ammunition is cross compatible with TASER® X26P, X26E, X26C, M26 and M18 CEW weapons.
8. Dimensions and weights are for reference only.

** Subject to many conditions such as but not limited to atmospheric pressure, ambient temperature and measurement methodology.

PhaZZer reserves the right to change this specification without notice. Phazzer licenses its intellectual property in the USA from Phazzer IP, LLC. including, but not limited to, trademarks such as: the registered PhaZZer® word and design marks, and other marks used by Phazzer. such as: Non-Sinusoidal Shaped Pulse output waveform, Static Guard, and Enforcer. TASER® and TASER Models mentioned herein are the intellectual property of Axon Enterprises, Inc, are not authorized or endorsed by of Axon Enterprises, Inc., and are for reference purposes only.

© 2017 PhaZZer. All rights reserved.

Title: PHAZZER® Enforcer™ Conducted Energy Weapon (CEW) Specification
Department: Research and Development
Version: 3.0
Release date: May 1, 2017
Page 2 of 2